



Address:
JAMBU PERSHAD & SONS
6275/22 Nicholson Road,
Ambala Cantt, Haryana,
INDIA
Pin: 133001

Email:
sales@japson.com
japsonambala@yahoo.com

Website:
www.japson.com
Phone:
+91-171-4006897

High Precision Balance - 220g/520g/1020g-0.001g

Product Image



Description

SPECIFICATIONS	MODEL	HPB201	HPB501	HPB1001
	Capacity	220 g	520 g	1020 g
	Pan Size	90 mm Ø		120 mm Ø
	Readability	0.001 g (1mg)		
	Repeatability (±)	0.001 g		
	Calibration	Internal Calibration		
	Linearity (±)	± 0.002 g		
	Min.(Capacity)	0.1 g		
	Display	LCD		
	Response Time	4Sec		
	Tare Range	Full		
	Operating Temperature	15°C to 30°C		
	Density	Yes		
	Unit	mg, g, ct, ozt, oz, GN, dwt, lb		
	Key Sound	Yes		
	Weighing Chamber Height	195 mm		
	Baudrate	1200, 2400, 4800, 9600		
	Class	I		
	Interface	RS232C		
	Data Output Mode	Command and continuous Output		
	Power Supply	AC 220V / 50-60 Hz		
	Dimension (LxWxH) mm	220 x 360 x 345 mm		
	Weight	10 kg		

Density Determination Kit for solid & liquid sample (Optional) - Manual Calculation



Electro Magnetic Force Compensation



Density Determination



Underhook Weighing



RS232C Interface



Internal Calibration



Counting Weighing mode



LCD display




Percentage Weighing



Multiple Weighing Units



TARE

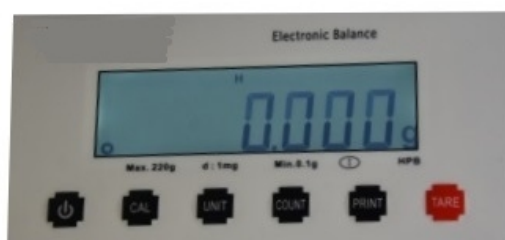

Standard Accessories

Instrument

Draft ring

Pan

Pan support

Dust guard

Adaptor

User manual

-
High Precision Balance - 220g/0.001g

Catalog No. 101133 (A)

High Precision Balance - 520g/0.001g

Catalog No. 101133 (B)

High Precision Balance - 1020g/0.001g

Catalog No. 101133 (C)

Disclaimer

The Products details given on this page are indicative in nature and JAPSON reserves the right to change them without prior notice. Buyer is also requested to re-check the specifications and other features of product at the time of order as product development is a continuous process and minor modifications may be made to design based on latest availability, process and design.